

Installation Instructions
Warmup Heated Towel Rail



Enquiries to:

Ecopower Heating
252 High Street
Aldershot
Hampshire
GU12 4LP

Web: www.ecopowerheating.co.uk
Email: enquiries@ecopowerheating.co.uk
Phone: 0845 474 1478


Installation:

Please note that this appliance **MUST** be installed as prescribed by the relevant wiring rules and regulations, including the regulations covering installation of appliances and accessories in 'wet areas' such as bathrooms, showers and laundries. Installation should be in accordance with local regulations.

NOTE:

- This class I appliance requires an earth connection.
- An accessible all pole disconnection switch is required within the fixed wiring circuit of the heated towel rail.

The heated towel rail should be mounted vertically with the cord exiting from the base; it should be positioned at least 600mm above the floor.

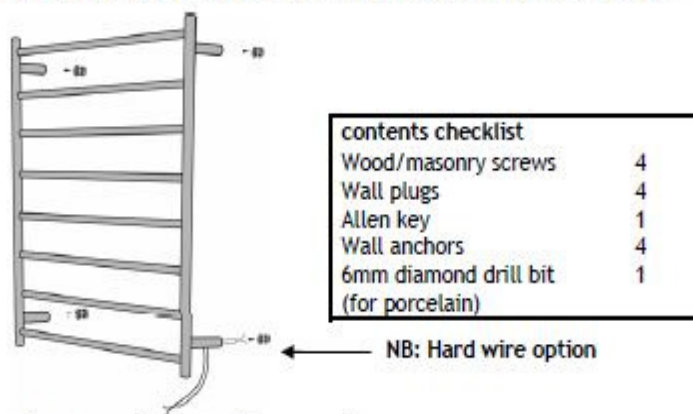

Recommended mounting procedures

- Put the towel rail against the wall in the desired position.
- Check that there are no cables within the wall in the area you are drilling into.
- Using a pencil, draw around the end of each tube to mark their positions on the wall - ensuring that the rail is square on the wall.
- Remove rail from the wall.
- Using a suitable drill bit and adequate drill, drill a hole into the tiles/wall to the required depth.
- Place a wall plug in the hole.
- Place a screw inside the wall anchor and then screw it into the wall plug. Wall anchors should be used where the radiator is being mounted onto plasterboard or tiles mounted on plasterboard.
- Put the towel rail on once all four anchors are in place then tighten using the Allen key provided.

Safety information:

As with any electrical appliance, you should be aware of basic safety precautions when using this heated towel rail. Please read these instructions, and file them for future reference:

- Because this appliance gets hot, young children and infirm people should be closely supervised when nearby. Do not let young children treat the towel rail as a toy.
- Be aware that the towel rail will get slightly hotter than normal during warmer weather and when insulated by towels.
- The rail should **NOT** be used for anything other than its intended use.
- It is dangerous to place towels or anything else which has been in contact with hazardous liquids on the towel rail.
- Use this appliance only on the voltage specified on the rating label.
- Electrical work should only ever be done by authorised persons.
- Do **NOT** immerse the towel rail in any liquid.
- Make sure the supply cord never touches heated surfaces.
- If the electrical cord or connection is damaged **DO NOT** attempt to repair; please contact the supplier.

WARNING: DO NOT install towel rails in areas which maybe subjected to saturation of water resulting in ingress of moisture. The electric circuit that the towel rails are connected to **MUST** be protected by a 30mA R.C.D(Residual Current Device)- Section 701.44.3.3. of BS7671. Warmup does not take any responsibility for damage caused to fittings during the installation process or due to incorrect installation procedures.

Operation:

It will take about ¾ hour to get up to temperature and can, if desired, be left running constantly.

Specifications:

dimensions			
Model:	HTR 680 x 450	HTR 800 x 600	HTR 800 x 600C
	ROUND	ROUND	ROUND CURVED
Height:	680mm	800mm	800mm
Width:	450mm	600mm	600mm
Depth:	120mm	120mm	120mm
Bars:	6	7	7
electrical			
Wattage:	55 W	100 W	100 W
Supply:	230-240 V ~ 50Hz, single phase		
Ingress Protection Rating:	IP34 - Splashproof - Double Insulated		